**TECHNICAL SPECIFICATIONS** End drain Drain Pump Location(s): Select 1 Std. = Standard / Alt LF/RF Optional Bath Weight (empty) 120 lbs Gallons to Operate 27-45

ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

BATHERS: 1	
INSTALLATION	
•	DECK (D)
	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

Jet & Control placement may vary

### STANDARD FEATURES& ACCESSORIES for SILVER WATER JET

#### **JETS**

9 Water Jets Tri-Zone Back Systems 3 Jets Ultra Flow Jets -Micro Flow Jets (•)

SKU: SERENITY-4532-SWJ

#### **PUMPS**

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

## **CONTROLS**

Air Switch On/Off Control(s)

## **PURITY**

HydroClean Water Purity System HydroCleanse

## STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

# REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:** 


**OVALS:** A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole


cut out size

**EZ CLEAN CAST ACRYLIC** LIMITED LIFETIME WARRANTY




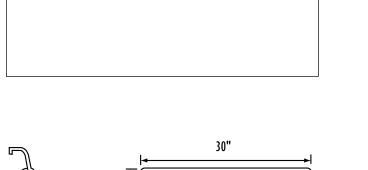






**INSTALLATION WILL NOT REQUIRE MORTAR BEDDING** 





NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.

lip profile