

# Escape 534 SKTF Silver Combination 60" x 34" x 22"

SKU: ESCAPE534SKTF-SCB



Silver Combination

| TECHNICAL SPECIFICATIONS      |                                      |
|-------------------------------|--------------------------------------|
| Drain                         | End drain                            |
| Pump Location(s): Select 2    | Std. = Standard / Alt LF/RF Optional |
| Bath Weight (empty)           | 165 lbs                              |
| Gallons to Operate            | 34-52                                |
| ELECTRICAL SPECIFICATIONS     |                                      |
| Motor/Pump                    | (2) 115v 20AMP GFCI Circuits         |
| Inline Stainless Steel Heater | (Opt.) 115v 20AMP GFCI Circuit       |

| BATHERS: 1   |                  |
|--------------|------------------|
| INSTALLATION |                  |
|              | DECK (D)         |
|              | UNDER MOUNT (U)  |
| •            | ALCOVE (A)       |
|              | FREESTANDING (F) |
|              | CLAWFOOT (L)     |
|              | PEDESTAL (P)     |

Jet & Control placement may vary



Skirt & Tile Flange - Access Panel with screws & caps



## STANDARD FEATURES & ACCESSORIES for Silver Combination

### JETS

- 21 Air & Water Massage Jets
- Accumassage Back, Neck Jets
- Ultra Flow Jets
- Micro Flow Jets
- Classic Air Jets

### PUMPS

- 2.25 Hydropower 1-speed Pump
- 1.0 Air Power 3-Speed Warm Air Pump
- Quiet Pad Anti-Vibration Mounted Pump

### CONTROLS

- Air Switch On/Off Control(s)
- Automatic Purge & Dry Cycle Control

### PURITY

- HydroClean Water Purity System
- HydroCleanse


## STANDARD ACCESSORIES

- Mood Light
- Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome
- Deluxe Cushion Pillow
- Integral Tile Flange
- EZ Level Adjustable Legs
- FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily)
- 30 Point Quality Assurance Factory Test

## REQUIREMENTS

- Pump Locations: Select 2
- Electrical: two 115v 20amp GFCI Circuits
- Tube should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor.**
- CUT OUT DIMENSIONS:**
  - OVALS:** A template will be provided
  - RECTANGLES:** Subtract 1" to 1.5" from length & width for hole cut out size

**EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY**

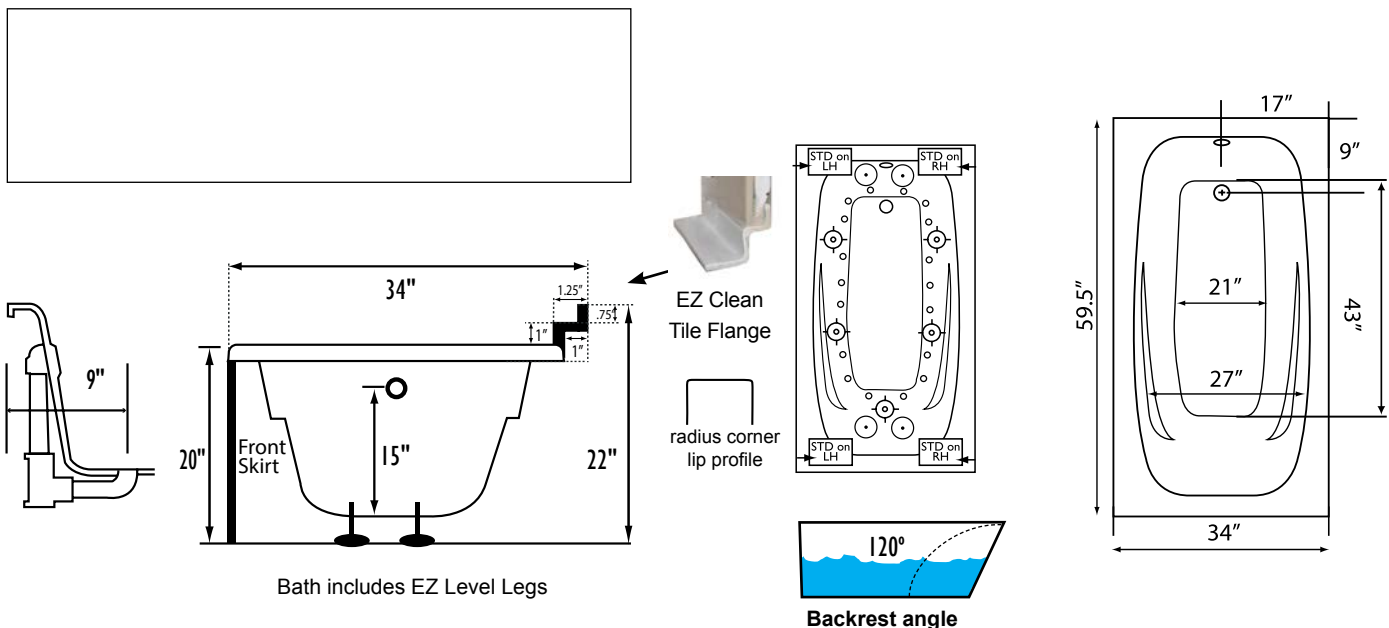

**NOTE:** Graphics may not be to scale. Specifications and features are subject to change without notice and are  $\pm .25"$ . All final measurements should be taken from **tub on site**. Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.