SKU: ESCAPE534SKTF-SOAKER



TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	165 lbs	
Gallons to Operate	34-52	

ELECTRICAL SPECIFICATIONS	
Motor/Pump	N/A
Inline Stainless Steel Heater	N/A

BATHERS: 1	
INSTALLATION	
	DECK (D)
	UNDER MOUNT (U)
·	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



caps



STANDARD FEATURES & ACCESSORIES for Soaker

STANDARD ACCESSORIES

Adjustable Leveling Legs Integral Tile Flange

REQUIREMENTS


Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS:

OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



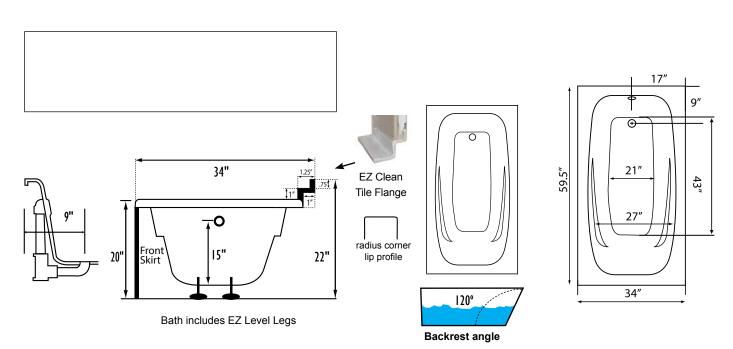

NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from **tub on site.** Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.