# Escape 542 SKTF Silver Combination 60" x 42" x 22" **.** 0

SKU: ESCAPE542-SCB

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Configuration: Select 2	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	175 lbs
Gallons to Operate	50-68
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(2) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt.) 115v 20AMP GFCI Circuit

# **STANDARD FEATURES & ACCESSORIES for Silver Combination**

### JETS

21 Air & Water Massage Jets Accumassage Back, Neck Jets Ultra Flow Jets -Micro Flow Jets (•) Classic Air Jets O

### PUMPS


2.25 Hydropower 1-speed Pump 1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

### CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

### PURITY

HydroClean Water Purity System HydroCleanse



#### Jet & Control placement

may vary



velcro access panel and tile flange

Silver Combination


## STANDARD ACCESSORIES

Mood Light Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome **Deluxe Cushion Pillow** Integral Tile Flange EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

### REQUIREMENTS

Pump Locations: Select 2 Electrical: two 115v 20amp GFCI Circuits Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:** OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

**EZ CLEAN CAST ACRYLIC** 

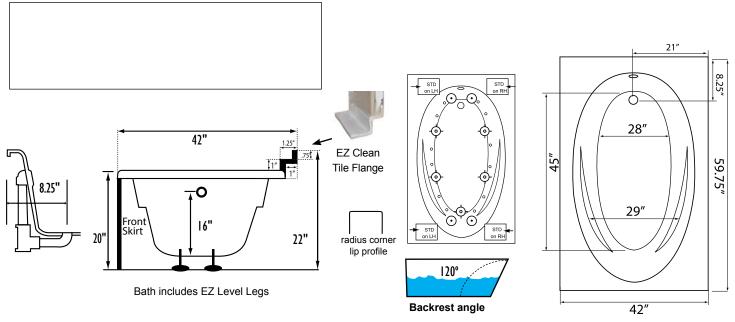

NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.