SKU: ESCAPE542-SOAKER <u> •</u> • Soaker

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Configuration: Select 1	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	175 lbs	
Gallons to Operate	50-68	

Gallons to Operate	50-68	
ELECTRICAL SPECIFICATIONS		
Motor/Pump	N/A	
Inline Stainless Steel Heater	N/A	

BATHERS: 1	
IN:	STALLATION
	DECK (D)
	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



STANDARD FEATURES & ACCESSORIES for Soaker

STANDARD ACCESSORIES

Adjustable Leveling Legs Integral Tile Flange

REQUIREMENTS


Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:**

OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



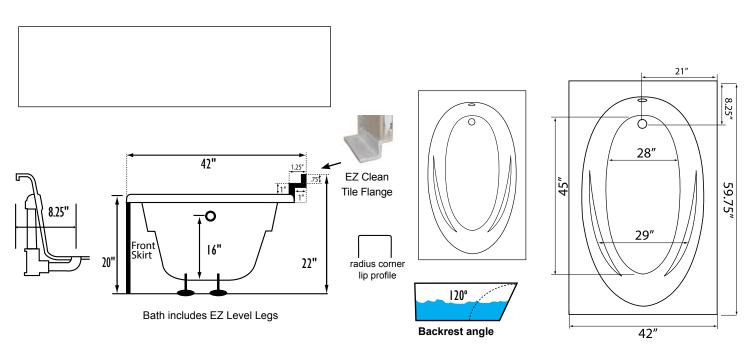

NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.