# Escape 5.534 SKTF Silver Combination  66" x 34" x 22"

**SKU:** ESCAPE5.534SKTF-SCB   👤 Ⓐ

## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| Drain | End drain |
| Pump Location(s): Select 2 | Std. = Standard / Alt LF/RF Optional |
| Bath Weight (empty) | 130 lbs |
| Gallons to Operate | 45-63 |

### ELECTRICAL SPECIFICATIONS

| | |
|---|---|
| Motor/Pump | (2) 115v 20AMP GFCI Circuits |
| Inline Stainless Steel Heater | (Opt.) 115v 20AMP GFCI Circuit |

## BATHERS: 1

### INSTALLATION

| | |
|---|---|
| | DECK (D) |
| | UNDER MOUNT (U) |
| • | ALCOVE (A) |
| | FREESTANDING (F) |
| | CLAWFOOT (L) |
| | PEDESTAL (P) |

Jet & Control placement may vary

Skirt & Tile Flange - Access Panel with screws & caps

## STANDARD FEATURES & ACCESSORIES for Silver Combination

### JETS
21 Air & Water Massage Jets
Accumassage Back, Neck Jets
Ultra Flow Jets  ⊙
Micro Flow Jets ⊙
Classic Air Jets ◯

### PUMPS
2.25 Hydropower 1-speed Pump
1.0 Air Power 3-Speed Warm Air Pump
Quiet Pad Anti-Vibration Mounted Pump

### CONTROLS
Air Switch On/Off Control(s)
Automatic Purge & Dry Cycle Control

### PURITY
HydroClean Water Purity System
HydroCleanse

### STANDARD ACCESSORIES
Mood Light
Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel,
         Oil Rubbed Bronze, Polished Chrome
Deluxe Cushion Pillow
Integral Tile Flange
EZ Level Adjustable Legs
FDA Recipe Non-Toxic Food & Beverage Grade
         Plumbing (primarily)
30 Point Quality Assurance Factory Test

### REQUIREMENTS
Pump Locations: Select 2
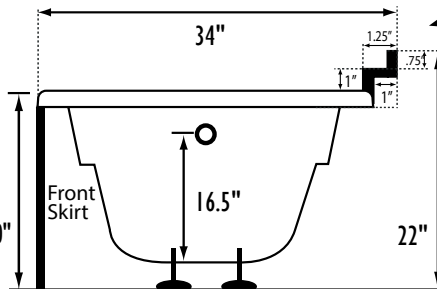Electrical: two 115v 20amp GFCI Circuits
**Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor.**
**CUT OUT DIMENSIONS:**
   **OVALS:** A template will be provided
   **RECTANGLES:** Subtract 1" to 1.5" from length & width for hole
         cut out size

**EZ CLEAN CAST ACRYLIC**
**LIMITED LIFETIME WARRANTY**  c(UL)us ANSI



34"

1.25"
.75"
1"
1"

EZ Clean Tile Flange

9"

Front Skirt

16.5"

20"

22"

radius corner lip profile

Bath includes EZ Level Legs

STD on LH   STD on RH
STD on LH   STD on RH

130°

**Backrest angle**

17"
9"
65.75"
19"
44"
26"
34"
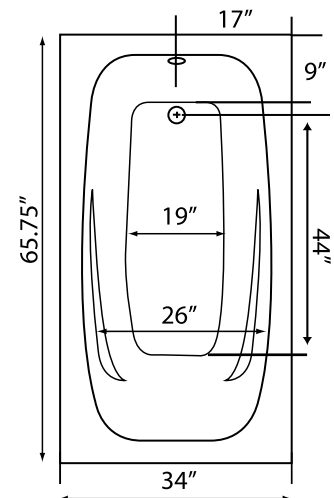
**NOTE:** Graphics may not be to scale.  Specifications and features are subject to change without notice and are ± .25".  All final measurements should be taken from **tub on site.**  Access 18"x 18" or larger is required for each pump.  Some pump locations and plumbing may extend beyond the perimeter of the bath.