SKU: PARADISE6060-GWJ

TECHNICAL SPECIFICATIONS	
Drain	Side drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	220 lbs
Gallons to Operate	85-115
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(1) 115v 20AMP GFCI Circuit

BATHERS: 2	
INSTALLATION	
•	DECK (D)
	UNDER MOUNT (U)
	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

Jet & Control placement may vary



**Gold Water Jet** 

# STANDARD FEATURES & ACCESSORIES for Gold Water Jet Package

12 Water Massage Jets Back Massage System(s) (6 Jets) Accumassage Back and Neck Jets ⊕ 6 Ultra Flow Jets -(•)-

# **PUMPS**

3.25 Hydropower 3-speed Pump Quiet Pad Anti-Vibration Mounted Pump

### **HEATERS**

Stainless Steel Electric Heater

## **CONTROLS**

Air Switch On/Off Control(s) For Hydro Pump & Mood Light 3 Speed Massage: High, Medium or Low

HydroClean Water Purity System\ HydroCleanse

# STANDARD ACCESSORIES

Mood Light

Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome

Deluxe Cushion Pillow

EZ Level Adjustable Legs

FDA Recipe Non-Toxic Food & Beverage Grade

Plumbing (primarily)

30 Point Quality Assurance Factory Test

## **REQUIREMENTS**

Pump Locations: Select 1

Electrical: two 115v 20AMP GFCI Circuits

Drain: Select Color / Finish

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor.

**CUT OUT DIMENSIONS:** 


OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole

cut out size

**EZ CLEAN CAST ACRYLIC** LIMITED LIFETIME WARRANTY (UL) US ANSI



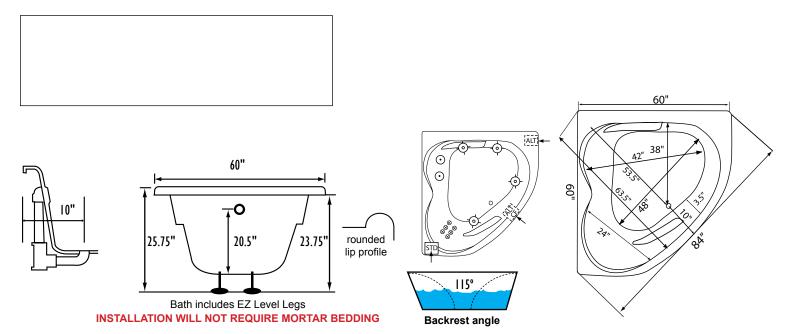

NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.