SKU: PARADISE6060-SWJ

**∸** • 0

X 00 X 20

TECHNICAL SPECIFICATIONS	
Drain	Side drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	220 lbs
Gallons to Operate	85-115
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

BATHERS: 2	
INSTALLATION	
•	DECK (D)
	UNDER MOUNT (U)
	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

Jet & Control placement may vary



Silver Water Jet

# STANDARD FEATURES & ACCESSORIES for Silver Water Jet Package

#### **JETS**

9 Water Jets
Tri-Zone Back Systems 3 Jets
Ultra Flow Jets

O
Micro Flow Jets

#### **PUMPS**

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

## **CONTROLS**

Air Switch On/Off Control(s)

# **PURITY**

HydroClean Water Purity System HydroCleanse

## STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

#### REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor.

**CUT OUT DIMENSIONS:** 


**OVALS:** A template will be provided


**RECTANGLES:** Subtract 1" to 1.5" from length & width for hole


cut out size


EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY





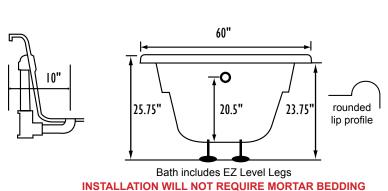





**NOTE:** Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from **tub on site.** Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.