

Rosabella Silver Air 72" x 42" x 27.5"

PRODUCT NUMBER: ROSABELLA-SAIR-K



SILVER AIR

TECHNICAL SPECIFICATIONS	
Drain	Side drain - Required - specify finish
Pump Location(s): Select 1	Remote blower or access panel Model A
Bath Weight (empty)	225 lbs
Gallons to Operate	77-112
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits

BATHERS: 2	
INSTALLATION	
	DECK (D)
	UNDER MOUNT (U)
	ALCOVE (A)
•	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

Jet & Control placement may vary

Space available for deck mounted or floor mounted faucet



JETS

12 Classic Air Jets Sidewall ○

PUMPS

1.0 Air Power 3-Speed Warm Air Pump
Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s)
Automatic Purge & Dry Cycle Control

PURITY

HydroCleanse

STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade
Plumbing (primarily)
30 Point Quality Assurance Factory Test

REQUIREMENTS

Pump Locations: **Select access panel model (A) for blower access through the tub surround.**

Or select remote air pump model where air pipe will run under the floor to the desired blower location up to 15' away from the bath.

Electrical: one 115v 20AMP GFCI Circuit




EZ CLEAN CAST ACRYLIC  **US ANSI**
LIMITED LIFETIME WARRANTY

DRAIN REQUIRED

with integral overflow and Flush Press -
Select finish: Brushed Nickel, Oil Rubbed Bronze,
Polished Chrome (not included)

FAUCET

Either Deck Mount or Floor Mount (not included)

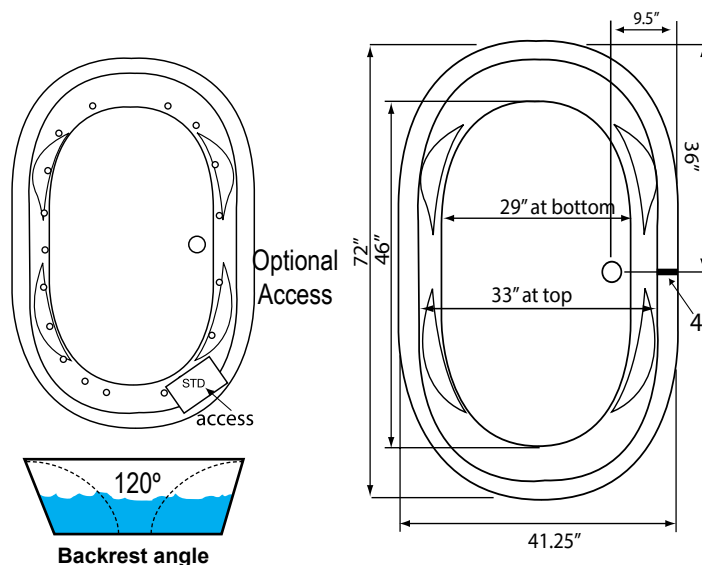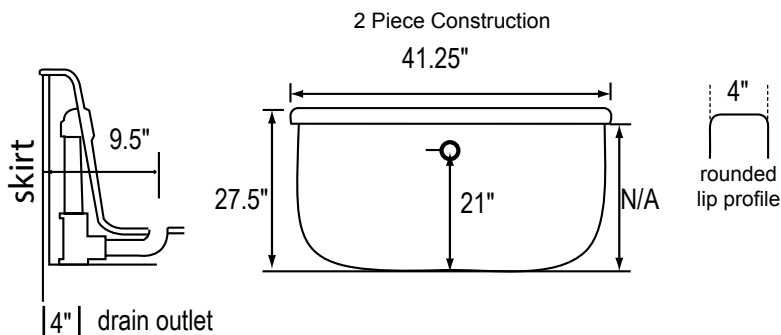

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". **NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.**