Venetian 7242 Silver Combination 72" x 42" x 22"

. 0

SKU: VENETIAN7242-SCB

TECHNICAL SPECIFICATIONS		ł
Drain	End drain	
Pump Location(s): Select 2	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	175 lbs	
Gallons to Operate	57-75	
ELECTRICAL SPECIFICATIONS		-
Motor/Pump	(2) 115v 20AMP GFCI Circuits	
Inline Stainless Steel Heater	(Opt.) 115v 20AMP GFCI Circuit	

STANDARD FEATURES & ACCESSORIES for SILVER COMBINATION

JETS

21 Air & Water Massage Jets Accumassage Back, Neck Jets Ultra Flow Jets Micro Flow Jets $\dot{\odot}$ Classic Air Jets Ŏ

PUMPS

2.25 Hydropower 1-speed Pump 1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

PURITY

HydroClean Water Purity System HydroCleanse

BATHERS: 1 **NSTALLATION** DECK (D) UNDER MOUNT (U) ALCOVE (A) FREESTANDING (F) CLAWFOOT (L) PEDESTAL (P)

Jet & Control placement

may vary

SILVER COMBINATION



STANDARD ACCESSORIES

Mood Light

Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome **Deluxe Cushion Pillow**

EZ Level Adjustable Legs

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test


REQUIREMENTS

Pump Locations: Select 2 Electrical: two 115v 20AMP GFCI Circuits Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:**

OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC



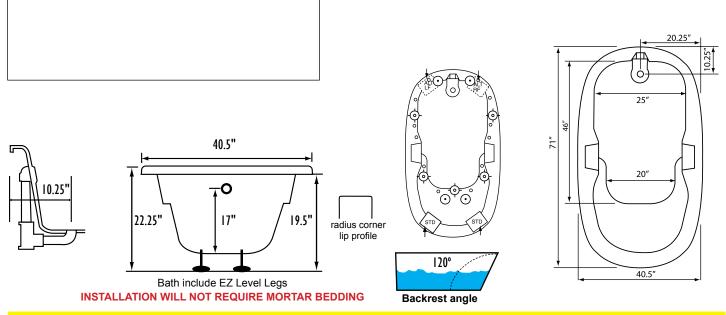

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.