

# Zen Oval 6636 Platinum Combination

SKU: ZENOVAL6636-PCB



66" x 36" x 24"

## PLATINUM COMBINATION

### TECHNICAL SPECIFICATIONS

Drain	End drain
Pump Location(s): Select 3	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	165 lbs
Gallons to Operate	66-84

### ELECTRICAL SPECIFICATIONS

Motor/Pump	(3) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(1) 115v 20AMP GFCI Circuit

### BATHERS: 1

#### INSTALLATION

• DECK (D)
• UNDER MOUNT (U)
ALCOVE (A)
FREESTANDING (F)
CLAWFOOT (L)
PEDESTAL (P)

Jet &  
Control  
placement  
may vary



## STANDARD FEATURES & ACCESSORIES for PLATINUM COMBINATION

### JETS

33 Air & Water Massage Jets  
Back Massage System(s) (7 Jets)  
Neck Massage Pillow (2 Jets) (⊕ ⊕)  
Sole Soother Jet(s) (⊗)  
Accumassage Back & Neck Jets (⊕)  
Ultra Flow Jets (⊙)  
Classic Air Jets (○)  
EZ Clean Air Jets (optional) (X)

### PUMPS

Two 2.25 Hydrowave 3-speed Pumps (End Drain Tubs)  
1.25 Air Power Variable Speed, Pulse & Wave heated Air Pump  
Quiet Pad Anti-Vibration Mounted Pump

### HEATERS

Stainless Steel Heater  
Warm Back Rest Tubing Zone

### CONTROLS

Air Switch On/Off for Chromatherapy Lighting  
Air Switch On/Off with digital Temperature Readout Hydro Pumps  
Electronic Variable Speed Air Massage Control with Automatic  
Purge & Dry Cycle Control Air Pump  
3 Speed Massage: High, Medium or Low

### PURITY

HydroClean Water Purity System  
HydroCleanse


### STANDARD ACCESSORIES

Grab Bar(s) - 2 on End Drain baths - White, Biscuit, Bone,  
Brushed Nickel, Polished Chrome  
Chromatherapy Lighting  
Deluxe Cable Drain - White, Biscuit, Bone, Brushed Nickel,  
Oil Rubbed Bronze, Polished Chrome  
Deluxe Cushion Pillow on 2 person baths  
Neck Massage Pillow  
EZ Level Base  
FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily)  
30 Point Quality Assurance Factory Test


### REQUIREMENTS

Pump Locations: Select 3  
Electrical: Four 115v 20AMP GFCI Circuits  
Cable Drain and Grab Bars: Select Color / Finish  
**Tub should not be supported by the lip in any way.**  
**Level tub & screw or glue EZ Level adjustable legs to sub floor.**  
**CUT OUT DIMENSIONS:**  
**OVALS:** A template will be provided  
**RECTANGLES:** Subtract 1" to 1.5" from length & width for hole  
cut out size

**EZ CLEAN CAST ACRYLIC**  
**LIMITED LIFETIME WARRANTY** cULus ANSI

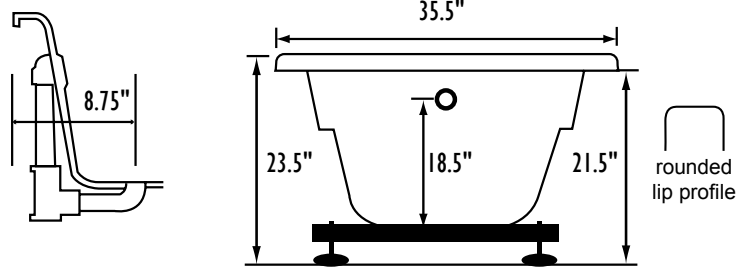

**INSTALLATION WILL NOT REQUIRE MORTAR BEDDING**

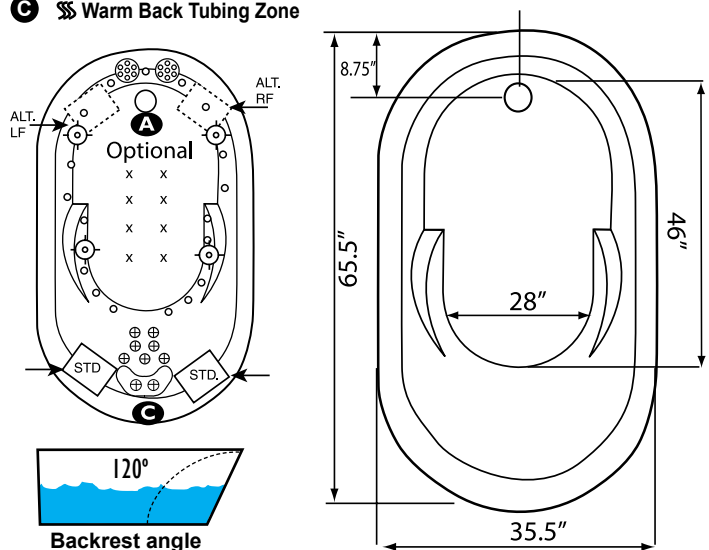

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are  $\pm .25"$ . All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.