

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	160 lbs	
Gallons to Operate	38-56	

ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

BATHERS: 1		
INSTALLATION		
	DECK (D)	
	UNDER MOUNT (U)	
·	ALCOVE (A)	
	FREESTANDING (F)	
	CLAWFOOT (L)	
	PEDESTAL (P)	





STANDARD FEATURES & ACCESSORIES for SILVER WATER JET

JETS

9 Water Jets Tri-Zone Back Systems 3 Jets Micro Flow Jets (•)

SKU: ZEN530SKTF-SWJ

PUMPS

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s)

HydroClean Water Purity System HydroCleanse

STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs Integral Skirt with Magnetic Access Panel

REQUIREMENTS

Pump Locations: Select 1 Electrical: one 115v GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue adjustable legs to sub floor. **CUT OUT DIMENSIONS:**


OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole

cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



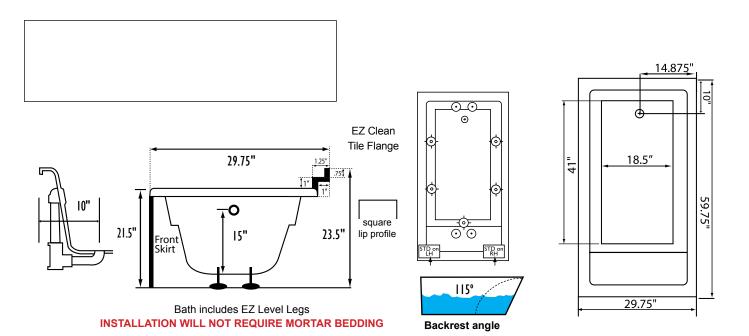

NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.