


TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	165 lbs
Gallons to Operate	38-56

ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

BATHERS: 1 INSTALLATION DECK (D) UNDER MOUNT (U) ALCOVE (A) FREESTANDING (F) CLAWFOOT (L) PEDESTAL (P)



Jet &

Control placement

may vary

access panel



STANDARD FEATURES & ACCESSORIES for SILVER WATER JET

JETS

9 Water Jets Tri-Zone Back Systems 3 Jets Micro Flow Jets (•)

PUMPS

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s)

HydroClean Water Purity System HydroCleanse

STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs Integral Skirt with Magnetic Access Panel

REQUIREMENTS


Pump Locations: Select 1 Electrical: one 115v GFCI Circuits


Tub should not be supported by the lip in any way. Level tub & screw or glue adjustable legs to sub floor. **CUT OUT DIMENSIONS:**


OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



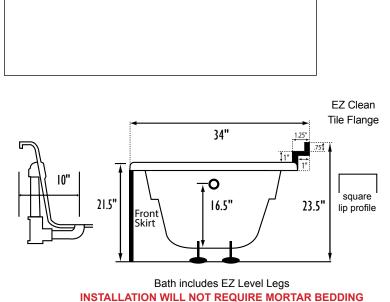





NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.