Mystique 5 SKTF Silver Combination 60" x 32" x 22"

Silver Combination SKU: MYSTIQUE5-SCB

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 2	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	155 lbs
Gallons to Operate	38-56

ELECTRICAL SPECIFICATIONS	
Motor/Pump	(2) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt.) 115v 20AMP GFCI Circuit

BATHERS: 1	
INSTALLATION	
	DECK (D)
	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



Skirt & Tile Flange - Integral skirt with velcro access panel



STANDARD FEATURES & ACCESSORIES for SILVER COMBINATION

21 Air & Water Massage Jets Accumassage Back, Neck Jets Ultra Flow Jets - 6-Micro Flow Jets (•) Classic Air Jets O

PUMPS

2.25 Hydropower 1-speed Pump 1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

PURITY

HydroClean Water Purity System HydroCleanse

STANDARD ACCESSORIES

Mood Light

Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome

Deluxe Cushion Pillow

Integral Tile Flange

EZ Level Adjustable Legs

FDA Recipe Non-Toxic Food & Beverage Grade

Plumbing (primarily)

30 Point Quality Assurance Factory Test

REQUIREMENTS

Pump Locations: Select 2

Electrical: two 115v 20amp GFCI Circuits

Tub should not be supported by the lip in any way. LeveL tub & screw or glue EZ Level adjustable legs to sub floor.

CUT OUT DIMENSIONS:


OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole

cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY (UL) us ANSI



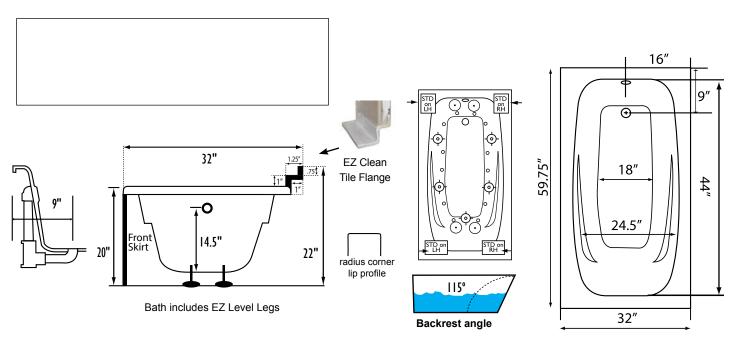

NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.