Mystique 5 SKTF Silver Water Jet 60" x 32" x 22"

SKU: MYSTIQUE5-SWJ Silver Water Jet

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	155 lbs
Gallons to Operate	38-56

ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

BATHERS: 1		
INSTALLATION		
	DECK (D)	
	UNDER MOUNT (U)	
•	ALCOVE (A)	
	FREESTANDING (F)	
	CLAWFOOT (L)	
	PEDESTAL (P)	

Jet & Control placement may vary

Skirt & Tile Flange
- Integral skirt with
velcro access
panel



STANDARD FEATURES & ACCESSORIES for SILVER WATER JET

JETS

9 Water Jets
Tri-Zone Back Systems 3 Jets
Ultra Flow Jets

O
Micro Flow Jets

•

PUMPS

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s)

PURITY

HydroClean Water Purity System HydroCleanse

STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs Integral Tile Flange

REQUIREMENTS

Pump Locations: Select 1
Electrical: one 115v GFCI Circuits


Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS:

OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



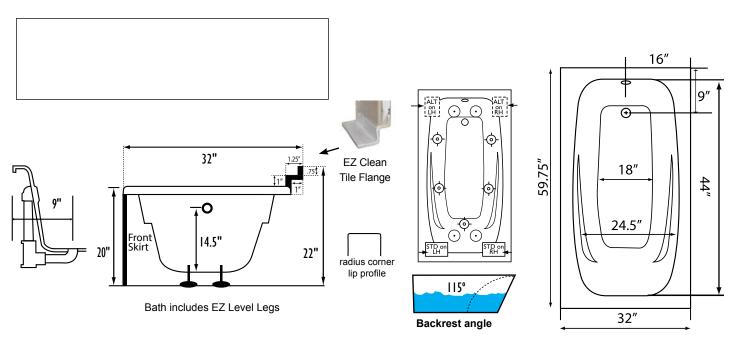

NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from **tub on site.** Access 18"x 18" or larger is required for each pump. Some pump locations and plumbing may extend beyond the perimeter of the bath.