

Zen 5.536 Soaker 66" x 36" x 23"

SKU: ZEN5536-SOAKER



| TECHNICAL SPECIFICATIONS | |
|-------------------------------|--------------------------------------|
| Drain | End drain |
| Pump Location(s): N/A | Std. = Standard / Alt LF/RF Optional |
| Bath Weight (empty) | 180 lbs |
| Gallons to Operate | 55-74 |
| ELECTRICAL SPECIFICATIONS | |
| Motor/Pump | N/A |
| Inline Stainless Steel Heater | N/A |

STANDARD FEATURES & ACCESSORIES for SOAKER

STANDARD ACCESSORIES

EZ Level Adjustable Legs

BATHERS: 1

INSTALLATION

- DECK (D)
- UNDER MOUNT (U)
- ALCOVE (A)
- FREESTANDING (F)
- CLAWFOOT (L)
- PEDESTAL (P)

SOAKER



REQUIREMENTS

Tub should not be supported by the lip in any way.



Level tub & screw or glue EZ Level adjustable legs to sub floor.

CUT OUT DIMENSIONS:

OVALS: A template will be provided




RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

**EZ CLEAN CAST ACRYLIC
LIMITED LIFETIME WARRANTY
TEXTURED FLOOR**

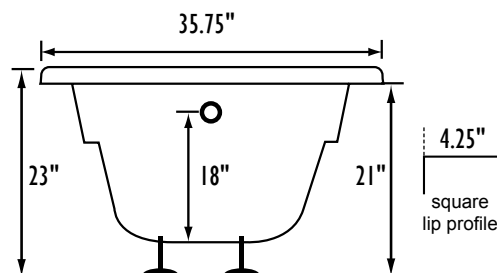

Bath include EZ Level Legs

INSTALLATION WILL NOT REQUIRE MORTAR BEDDING

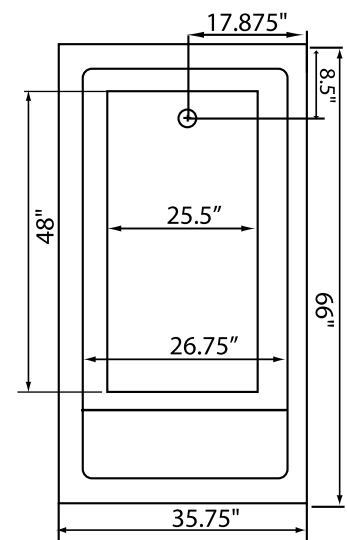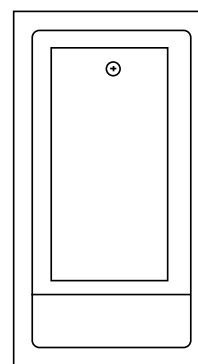

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are $\pm .25"$. All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.